

New Collection
2019

NAN^oTECH
600x600mm
VITRIFIED TILES



High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product




Eco-Friendly




Water Absorption

VITRIFIED TILES 600x600mm

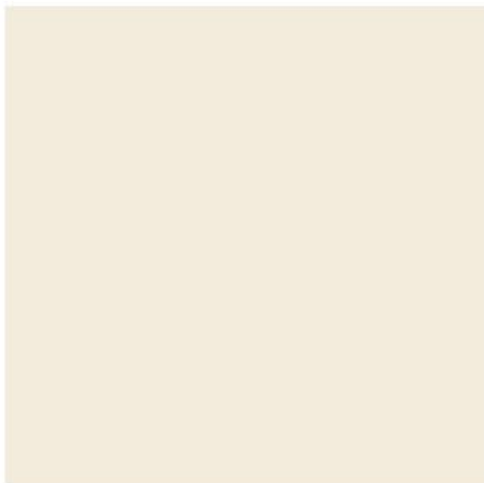

Ivory Plain

NEW

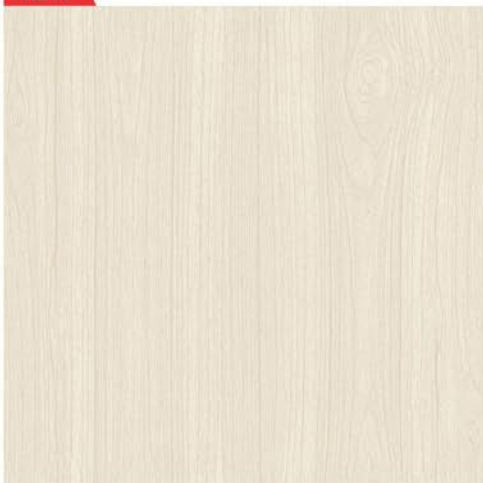

Soft Wood



Stripe



Agon






VITRIFIED TILES 600x600mm



Mimoza

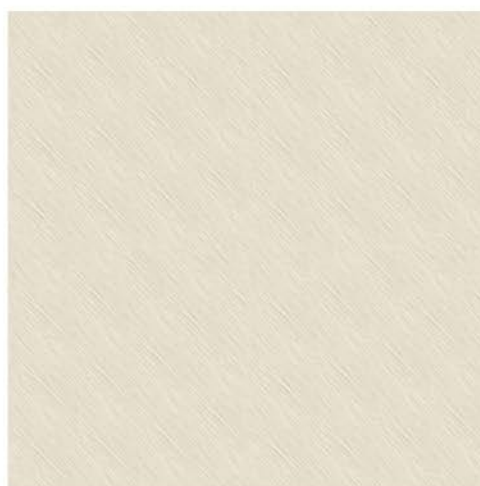

Mosco



Pietra



Marbito



High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product



Eco-Friendly



Water Absorption

VITRIFIED TILES 600x600mm



Flower



Antique





Traver



Legno Gris





High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product



Eco-Friendly




Water Absorption

VITRIFIED TILES 600x600mm



Liberty

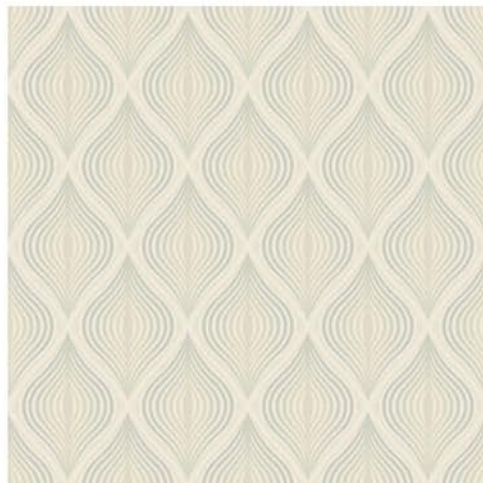

Agatha

NEW



Wave

NEW



Fiesta



- High Gloss Finish
- Long Lasting Design
- Aesthetic Look
- Durable Product
- Eco-Friendly
- Water Absorption

VITRIFIED
TILES
600x600mm



Gothic



Italiya



Simero



Travertino



High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product



Eco-Friendly



Water Absorption

VITRIFIED TILES 600x600mm



Orizia



Ebano Wood





Speno




Murano



- High Gloss Finish
- Long Lasting Design
- Aesthetic Look
- Durable Product
- Eco-Friendly
- Water Absorption

VITRIFIED
TILES
600x600mm

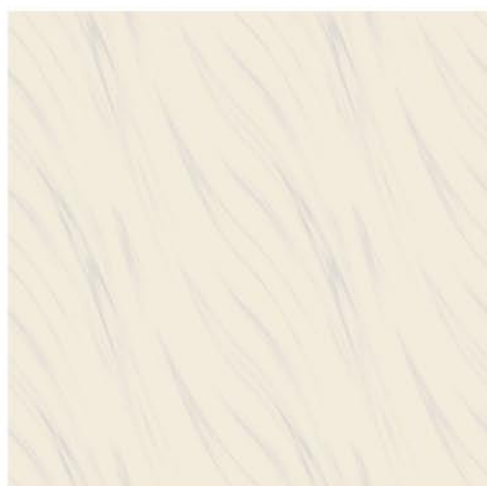

Sienna



Decora



NEW



Oslo Nut

NEW



Castilla



High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product




Eco-Friendly



Water Absorption


VITRIFIED TILES 600x600mm

NEW

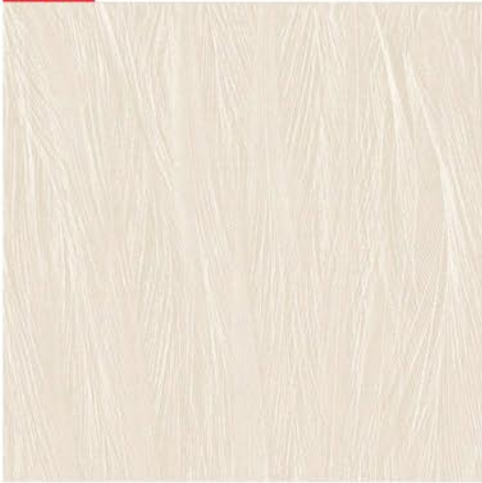

Feather

NEW

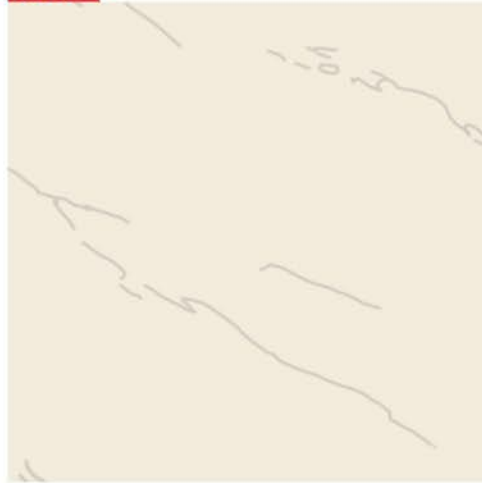

Liner





High Gloss Finish



Long Lasting Design



Aesthetic Look



Durable Product



Eco-Friendly



Water Absorption

VITRIFIED TILES 600x600mm

NEW



Lotus

NEW




Diamond

NEW



Sparkle

NEW

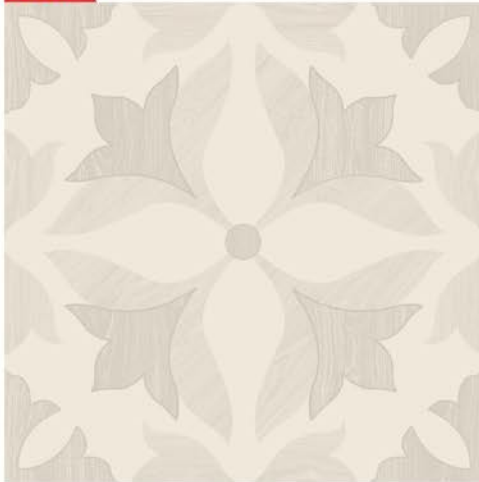

Leaf




TECHNICAL SPECIFICATION

Sr. No	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	OUR VALUE	Method Of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5.0%	± 3.0%	EN 98
3.	Straightness of sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.2%	EN 98
6.	Water absorption*	< 0.5%	< 0.05%	EN 99
7.	Mohs hardness*	> 6	> 8	EN 101
8.	Flexural Straightness*	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion resistance	< 204 mm ²	< 144 mm ²	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength*	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 65% - 70% reflection	Glossmeter

PACKING DETAIL

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600 x 600 mm	8.00 mm (Approx)	4 pcs.	1.44 Sq. Mtr.	26 Kgs. (Approx)

APPLICATIONS

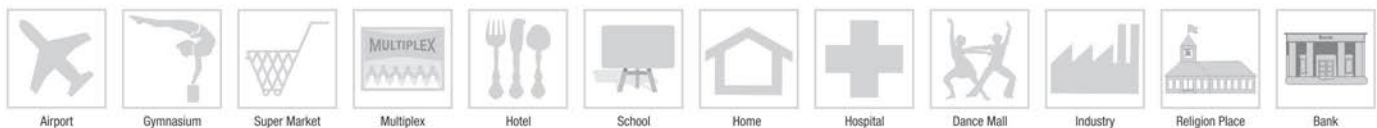

Note : Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.